


LMBR Machined Bearing for Rod

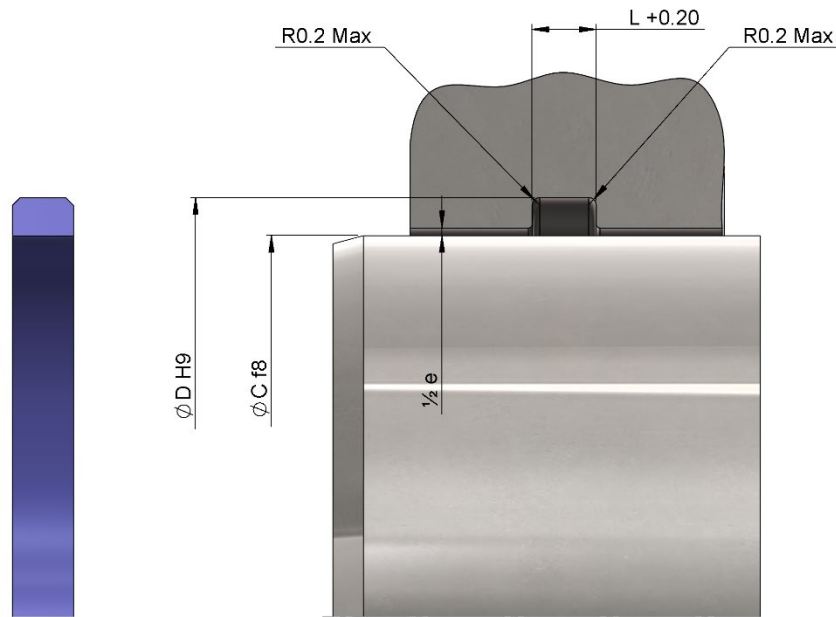

Range of Application

Operating Temperature: -250°C to +320°C

Housing Dimensions

Cross Section	Recommended Rod Ø Range		Groove Width	Groove Depth	Diametral Clearance	
	C		L	D	e	
			(mm)	(mm)	(mm)	
	≥	<				
3	8	20	3.2	C + 3	0.4	1.0
4	15	35	4.2	C + 5	0.5	2.0
6	20	75	6.3	C + 5	0.5	2.0
8	30	250	8.5	C + 5	0.5	2.0
9	50	300	9.7	C + 5	0.5	2.0
10	50	300	11.0	C + 5	0.5	2.0
14	120	300	15.0	C + 5	0.5	2.0

- Prevents metal to metal contact.
- Wear resistant.
- Protects seals.
- Low coefficient of friction.
- High load bearing capability.
- Custom shapes and sizes available on request.